


MULTILIFT ULTIMA



Technical data

Type	ULTIMA 21 S	ULTIMA 21 Z
Vehicle type	3 axle	3 axle
GVW of the vehicle (t)	26	26
Capacity (t)	21	21
G-length	46 – 63	51 – 61
System weight (kg) *	2290 – 2590	2690 – 2840
Tipping angle (°)	50 – 46	53 – 49
Max. operating pressure (MPa)	30	30
Recommended oil flow (l/min)	100	100

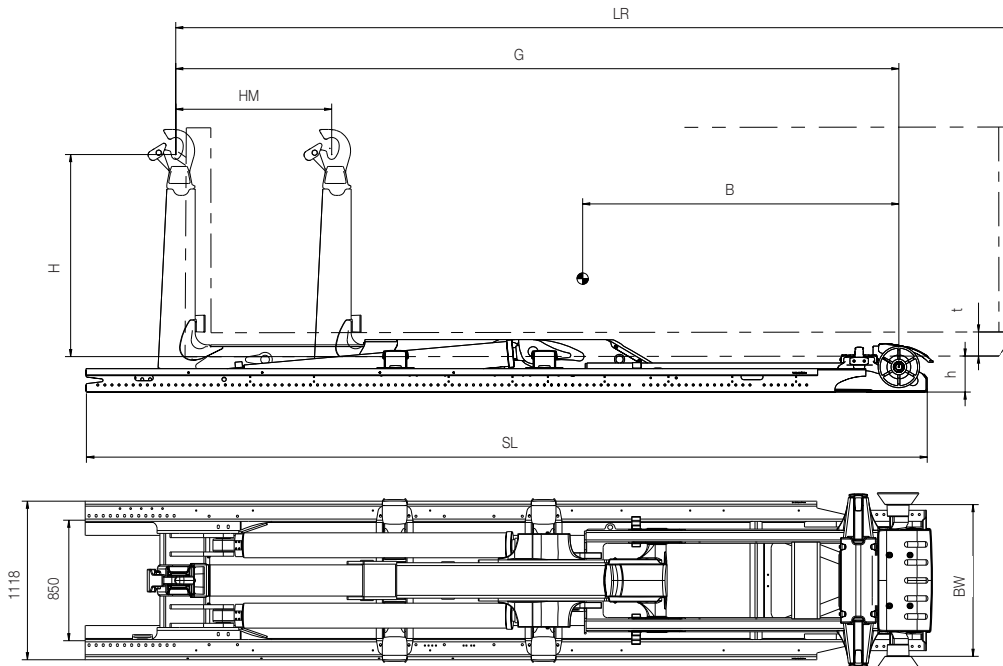

Primary dimensions

Model	ULTIMA
LR = Body length (min – max) internal (m)	4,0 – 7,3
BW = Body width (mm)**	1070/1120/1152
SL = Subframe length (mm)***	5333 – 6783
B = Centre of gravity (mm)	2450 – 3300
G = Exact G-length (mm)	4580 – 6310
HM = Horizontal movement (mm)	900 – 1450
t = Min. Free tunnel height (body) (mm)**	105/125
h = Installation height (mm)**	250/270
H = Hook height (mm)**	1400/1425/1450/1575

* Weight includes hydraulic body locking and excludes oil tank and oil.

** Might vary depending on country specifications.

*** The subframe length (SL) can be reduced to achieve a final installation length.

The minimum installation length depends upon country and control valve position.

For an exact installation length dimension please contact your local MULTILIFT dealer.